Compositional Neural Network Verification via Assume-Guarantee Reasoning

Anonymous Author(s)

Affiliation Address email

Abstract

Verifying the behavior of neural networks is necessary if developers are to confidently deploy them as parts of mission-critical systems. Toward this end, researchers have been actively developing a range of increasingly sophisticated and scalable neural network verifiers. However, scaling verification to large networks is challenging, at least in part due to the significant memory requirements of verification algorithms. In this paper, we propose an assume-guarantee compositional framework, CoVeNN, that is parameterized by an underlying verifier to generate a sequence of verification sub-problems to address this challenge. We present an iterative refinement-based strategy for computing assumptions that allow sub-problems to retain sufficient accuracy. An evaluation using 7 neural networks and a total of 140 property specifications demonstrates that CoVeNN can verify nearly 7 times more problems than state-of-the-art verifiers. CoVeNN is available at: https://anonymous.4open.science/r/CoVeNN-8FD0.

4 1 Introduction

2

3

5

6

8

10

11

12

13

- Machine learning (ML) techniques are advancing rapidly and have reached a level of performance across a range of challenging tasks, e.g., in the medical [1, 2] and autonomous driving [3, 4, 5] domains, that has led developers of critical systems to include ML models as components. To assure that such systems are fit for deployment, researchers have developed a variety of formal verification techniques to prove correctness properties of ML models, e.g., [6, 7, 8, 9, 10, 11, 12].
- Advances in neural network verification (NNV) have been dramatic since the landmark paper by Katz et al. [6] which verified properties of models comprised of 6 linear layers. VNN-COMP [13, 14, 15, 16] has chronicled those advances by documenting the growth of benchmarks and verifiers. The largest benchmark in the competition, as measured by the number of layers, has grown from 6 to 21; where all but 2–3 of those layers are convolutional. Although these networks present are challenging for verifiers, they do not reflect the complexity of modern ML models.
- While the number of layers in a network is not the only factor that contributes to the difficulty of a verification problem, it is directly related to its exponential complexity [6]. For SoTA verifiers, like $\alpha\beta$ -CROWN [8], NeuralSAT [17], and PyRAT [18], the worst-case involves each layer generating multiple states which each serve as the starting point for verification of the suffix of the network from that state forward. These verifiers perform a variety of optimizations to mitigate such state splitting, e.g., by tightening state encodings [19, 10], but complexity grows with the depth of the model.
- This complexity is manifest both in increased runtime and, perhaps more importantly, in memory utilization. SoTA NNV tools make use of GPUs to efficiently manipulate high-dimensional abstractions of model states and GPU memory is generally more limited than CPU memory—in our evaluation (§4) GPU VRAM is limited to 24 GB. If verification requires more GPU memory than is available, then

the verifier will abort with an out-of-memory (OOM) error. Fig. 1 shows the memory-consumption of the two top performing verifiers in VNN-COMP'24: $\alpha\beta$ -CROWN and NeuralSAT, as they check 37 10 randomly generated local robustness properties of ResNet models trained on CIFAR10, with an 38 increasing number of residual blocks in each model. The x-axis corresponds to the number of blocks 39 within the model (e.g., 16 corresponds to ResNet-50 [20]). The y-axis plots the maximum memory 40 consumed, as a percentage of 24 GB, by the verifier across the 10 verification problems. A point in 41 the plot is shown if the verifier returns normally on any problem, regardless of whether the result is 42 verified or unknown. $\alpha\beta$ -CROWN and NeuralSAT are able to verify all problems up to 9 blocks, 43 but beyond that they exhaust memory. While GPU memory has grown slowly over time, the pace of 44 that growth cannot be relied on for scaling to large neural network verification problems. 45

In this paper, we introduce a framework for Compositional 46 Verification of Neural Networks (CoVeNN) that can be pa-47 rameterized by an underlying NNV tool, like $\alpha\beta$ -CROWN 48 and NeuralSAT. CoVeNN works by decomposing a neural 49 network into subnetworks that are then verified indepen-50 dently. As depicted in Fig. 1, this allows CoVeNN to scale 51 to larger networks than the underlying verifier. 52

The key to CoVeNN is the ability to encode the verification of the subnetworks as a series of assume-guarantee reasoning steps. After verifying each subnetwork, CoVeNN merges relevant verifier states, such as approximation bounds, into a compact summary that serves as the assumption for the next subnetwork. The corresponding guarantee ensures that, under this assumption, the subnetwork behaves correctly. Together, these assume-guarantee pairs are composed to establish the correctness of the full network.




Fig. 1: Tools' scalability on ResNet-based instances. Maximum memory usage across 10 CIFAR10-based properties and ResNetbased networks with increasing numbers of blocks, comprised of 3 CNNs with ReLUs.

State merging is a classic approach for managing the cost of analysis and verification [21], but it risks introducing overapproximation that may prevent properties from being proven. To mitigate 64 this, CoVeNN incorporates multiple refinement strategies that sharpen the precision of assumptions. 65 As detailed in Tab. 4, CoVeNN matches the ability of underlying verifiers on problems for which 66 they complete and the refinement strategies allow it to prove properties when scaling to much larger 67 networks. CoVeNN does introduce overhead relative to the underlying verifier, but our evaluation (§4) 68 on a set of challenging verification problems shows that substantial reduction in memory consumption 69 translates to a significant increase in the ability to verify problems without an exorbitant time penalty. 70

Related Work NNV is still a relatively young field, and few lines of work have explored compositional NN verification [22, 23]. However, no prior technique can handle the scale or complexity of networks like RESNET36. We discuss these work and others in more detail in Apdx. D.

Contributions The primary contribution of this paper lies in the definition of a verifier-independent framework for compositional assume-guarantee verification of neural network properties. We implement and evaluate CoVeNN's ability to reduce verifier memory consumption and increase the number of properties proven (§4) and assess overall performance of CoVeNN relative to SoTA DNN verifiers on verification problems formulated over variants of neural network architectures.

Background

53

54

55

56

57

58

59

60

61

62

71

72

73

74

75

76 77

78

79

81

DNN Verification Verification of networks using piecewise-linear activation (e.g., ReLU) can be 80 represented as a satisfiability problem [6, 11, 17, 10]. For an L-layer ReLU-based network \mathcal{N} with N_l neurons in layer l, the formula: 82

$$\alpha \equiv \bigwedge_{i \in [1,L]; \ j \in [1,N_l]} v_{i,j} = \max \left(\sum_{k \in [1,N_l]} (w_{i-1,j,k} \cdot v_{i-1,j}) + b_{i,j}, 0 \right)$$

defines the network. Given α and a property $\phi \equiv \phi_{in} \Rightarrow \phi_{out}$ a DNN verification problem is formulated by checking the satisfiability: $\alpha \wedge \phi_{in} \wedge \neg \phi_{out}$. If it is unsatisfiable, then ϕ is a valid property of \mathcal{N} . Otherwise, ϕ is not valid and a *counterexample*—a witness that ϕ is not valid—is a satisfying assignment to the input variables in ϕ_{in} .

DNN Verifiers Modern DNN verifiers [18, 12, 11, 9, 10, 8] adopt techniques from abstract interpretation [24] for efficiency. Since most properties studied in previous work can be expressed as 88 a Boolean expression over a linear equation of \mathcal{N} 's outputs, where ϕ_{out} can be merged as the last 89 layer of \mathcal{N} to produce an objective function $f := \phi_{out} \circ \mathcal{N}$ [19, 9], the final goal reduces to prove: 90 $\forall x \in \phi_{in} : f(x) \geq 0$. Solving $\min_{x \in \phi_{in}} f(x)$ is challenging due to the non-linearity of DNNs. 91 Modern DNN verifiers overapproximate nonlinear computations of $\mathcal N$ to efficiently estimate the 92 lower bound of f(x), denoted as lb, i.e., $\forall x \in \phi_{in} : lb \le f(x)$, then providing $lb \ge 0$ is sufficient to 93 formally prove f(x) > 0. This allows abstraction-based DNN verifiers to side-step the disjunctive 94 splitting that is the performance bottleneck of constraint-based DNN verifiers. 95

Compositional Verification For more than four decades researchers have been investigating *compositional* methods to scale verification of complex systems [25]. One widely used compositional approach, termed *rely-guarantee* or *assume-guarantee* reasoning, was introduced by Stark [26]. For a system M with a specification ϕ , the goal is to prove $\phi_{in}, M \models \phi_{out}$ —we denote such a proof goal with the triple $\langle \phi_{in}, M, \phi_{out} \rangle$. Compositional reasoning divides a system into parts, $\{M_1, \ldots, M_k\}$, and formulates a set of local verification problems $\langle A_i, M_i, G_i \rangle$ such that the guarantees of one component implies the assumptions of another and ϕ_{in} and ϕ_{out} are the assumption of the first and guarantee of the final components, respectively.

The promise of compositional methods is that they can reduce the complexity of verification by 104 replacing reasoning about the product of the M_i with reasoning about their sum. However, realizing 105 such a framework is non-trivial: it requires suitable rules to relate the guarantees of one component 106 to the assumptions of another, careful selection of decomposition strategies to achieve cost-effective 107 verification [27], and the identification of appropriate assumptions A_i [28]. CoVeNN addresses these 108 challenges by exploiting the inherent sequential structure of neural architectures to define composi-109 tional proof rules tailored to layer-wise reasoning, adaptively selecting the degree of decomposition 110 to maximize proof completion, and iteratively refining assumptions to support verification. Our 111 approach builds on recent work in neural network verification by leveraging modern verifiers' ability 112 to compute tight overapproximations of intermediate outputs, which we then use as assumptions for 113 verifying subsequent layers.

3 Compositional Verification of Neural Networks

Alg. 1 shows the CoVeNN algorithm, which takes as input the DNN \mathcal{N} , the formulae $\phi_{in} \Rightarrow \phi_{out}$ representing the property to be proven, the factor P indicating the number of generating assumptions, the scale factor F for constructing assumptions, and the number of iterative rounds r. CoVeNN returns unsat if ϕ is a valid property of \mathcal{N} , and unknown otherwise.

120 CoVeNN consists of three main phases: (i) decomposing the original network into subnetworks (line 1),
121 (ii) computing a coarse overapproximation of intermediate assumptions (line 2–line 4), then checking
122 the last subnetwork (line 5), and (iii) refining the assumptions iteratively until the problem can be
123 verified (line 12–line 18). The following sections describe each phase in detail.

3.1 Decomposition

96

97

100

101

102

103

115

124

CoVeNN starts by splitting the original network into K subnetworks $(\mathcal{N}_1, ..., \mathcal{N}_K)$ (line 1), where K is internally inferred by CoVeNN using the heuristics described below. This step reduces verification complexity by enabling the sequential verification of smaller, more manageable subnetworks.

More formally, decomposition works as follows. A network, \mathcal{N} , is defined by a computation graph, $\mathcal{G}_{\mathcal{N}}$, whose nodes define computations, e.g., matrix multiplication, and whose edges describe data flow between computations. We restrict our attention to acyclic computation graphs, which are common in many classes of ML models. Our approach supports any decomposition into k subnetworks such that: $\mathcal{N} := \mathcal{N}_k \circ \mathcal{N}_{k-1} \circ \ldots \circ \mathcal{N}_1$, and the input nodes of each \mathcal{N}_i define a cut of $\mathcal{G}_{\mathcal{N}}$ [29]. Given such a decomposition a simple proof rule for sequential composition can be defined:

$$\frac{\langle A, \mathcal{N}_i, I \rangle}{\langle I, \mathcal{N}_{i+1}, G \rangle} \frac{\langle I, \mathcal{N}_{i+1}, G \rangle}{\langle A, \mathcal{N}_{i+1} \circ \mathcal{N}_i, G \rangle} \tag{1}$$

Alg. 1: CoVeNN algorithm.

```
input: Verifier V, DNN N, property \phi_{in} \Rightarrow \phi_{out}, number of neurons P, scale factor F and rounds r
    output : unsat if the property is valid and unknown otherwise
 1 \ (\mathcal{N}_1, ..., \mathcal{N}_K) \leftarrow \mathsf{decomposeNetwork}(\mathcal{N}) \ / / \ \mathsf{automatically split} \ \mathcal{N} \ \mathsf{into} \ K \ \mathsf{subnetworks}
 \gamma_{over} \leftarrow [\phi_{in}]
 3 for i \in [1,...,K] do // initialize coarse overapproximation for each subnetwork
     \gamma_{over}.append(\texttt{overApproximate}(\mathcal{N}_i, \gamma_{over}[i-1]))
 5 lb \leftarrow \mathcal{V}.\mathtt{check}(\gamma_{over}[K],\phi_{out}) // check last subnetwork overapproximation w.r.t. output property
 6 if all(lb > 0) then // check if last subnetwork is verified
     return unsat // \langle \phi_{in}, \mathcal{N}, \phi_{out} \rangle is valid
 s while r > 0 do
          for i \in [1,...,K-1] do // attempt to verify first K-1 subnetworks
                 \gamma_{assume} \leftarrow \texttt{generateAssumption}(\mathcal{N}_i, \gamma_{over}[i-1], \gamma_{over}[i], P, F) \text{ // see (Apdx. C)}
10
11
                lb \leftarrow \mathcal{V}.\texttt{verify}(\mathcal{N}_i, \gamma_{over}[i-1], \gamma_{assume}) / / \texttt{verify assumptions} \langle \gamma_{in}, \mathcal{N}_i, \gamma_{assume} \rangle
                 (L_{over}, U_{over}) \leftarrow \gamma_{over}[i] // extract bounds to refine (tighten)
12
                for \{(i, rhs, direction), li\} \in zip(\gamma_{assume}, lb) do // refine assumption for each neuron i-th if direction = " \geq " then // assume Y_i \geq rhs, guarantee Y_i - rhs \geq li
13
14
                        L_{over}[i] \leftarrow r\overline{h}s + li
15
                       \mathbf{else} \; \textit{//} \; \text{assume} \; Y_i \leq rhs \text{, guarantee} \; -Y_i + rhs \geq li
16
                        U_{over}[i] \leftarrow rhs - li
17
                \gamma_{over}[i] \leftarrow (L_{over}, U_{over}) // update refined (tightened) bounds
18
          lb \leftarrow \mathcal{V}.\mathtt{verify}(\mathcal{N}_K, \gamma_{over}[K-1], \phi_{out}) // verify last subnetwork
19
          if all(lb \geq 0) then // check if last subnetwork is verified
20
            | return\ unsat\ //\ \langle \phi_{in}, \mathcal{N}, \phi_{out} 
angle is valid
21
22
          r \leftarrow r - 1
    return unknown
```

For a k-way decomposed network, the rule is applied k times with carefully chosen intermediate assumptions I, each serving as the guarantee of one step and the assumption of the next. If the first assumption is $A = \phi_{in}$ and the final guarantee is $G = \phi_{out}$, then verifying all subnetworks implies that the original network satisfies $\phi_{in} \Rightarrow \phi_{out}$.

Decomposing Heuristics A neural network can be decomposed into k subnetworks in various ways, and the success of compositional reasoning depends largely on how it is decomposed [27]. CoVeNN uses four heuristics to automatically guide this choice. We prioritize (1) cuts that define the inputs of layers in the network, because this leads to subnetworks that have input/output shapes that are well-supported by existing verifiers; (2) minimum cuts, because these reduce the dimensionality of the intermediate assumption, I; (3) cuts that are *later* in the network – a cut, c_2 , is later than cut, c_1 , if all vertices in c_2 are dominated by some node in c_1 , because this reduces imprecision in computation of I; and (4) cuts that yield the largest subnetworks that are amenable to verification by existing verifiers, because this minimizes the number of subnetworks that need to be verified.

3.2 Bound Approximations and Verification

138

139

140

141

142

144

145

146

147

CoVeNN next performs an initial, coarse *overapproximation* for each subnetwork sequentially (line 2-line 4). This is done using an off-the-shelf verifier \mathcal{V} —typically a modern BaB-based tool such as $\alpha\beta$ -CROWN[8] or NeuralSAT[17]—which returns conservative output bounds based on the current property. CoVeNN leverages the computed bounds to verify properties and guide the iterative refinement discussed in §3.3.

Once the overapproximations are computed, CoVeNN simply checks whether the approximation of the last subnetwork satisfies the output property (line 5). As described in §2, if $\mathcal V$ returns a lower bound $lb \geq 0$ (line 6), the property is verified and CoVeNN concludes unsat. Otherwise, it proceeds with refinement to sharpen the result.

Although only the last subnetwork is being verified (since it directly relates to the original output property), this verification depends on the approximations computed for the earlier K-1 subnetworks. These serve as assumptions in a chain of *assume-guarantee* obligations. Each intermediate bound acts

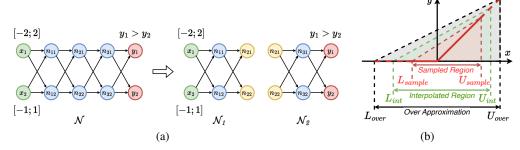


Fig. 2: (a) Example of a decomposed FC network with three hidden layers and (b) Regions of a hidden ReLU.

as both a guarantee for its originating subnetwork and an assumption for the next. We will discuss more about these assumptions and their refinement in the next section.

3.3 Iterative Refinement

160

161

162

181

182

183

184

185

186

187

188

189

In most cases, the initial approximation in §3.2 is too coarse to verify the property of interest. Thus, CoVeNN enters the *refinement* phase (line 9-line 18), which iteratively tightens the approximations until the problem can be verified (e.g., returns unsat) or CoVeNN exceeds the maximum predefined rounds r (e.g., returns unknown). CoVeNN's refinement has three main steps: (1) generating assumptions, (2) verifying assumptions, (3) refining assumptions. The algorithm makes up to r iterations comprised of sequentially verifying each subnetwork.

Generate Assumptions For each subnetwork \mathcal{N}_i , assumptions γ_{assume} are generated (line 10) based on its input conditions and pre-computed overapproximation following the procedure in Alg. 2. CoVeNN automates the generation of assumptions by systematically interpolating between coarse overapproximations and tight sample-driven bounds on subnetwork outputs, as detailed in Apdx. C. These assumptions reflect the possible output behavior of \mathcal{N}_i given the input property γ_{in} .

Verify Assumptions CoVeNN attempts to verify γ_{assume} of the subnetwork \mathcal{N}_i , or $\langle \gamma_{in}, \mathcal{N}_i, \gamma_{assume} \rangle$, using the verifier \mathcal{V} (line 11). As described above, CoVeNN extracts the lower bound lb from the verifier to facilitate this task. If verify an assumption fails (i.e., lb < 0), γ_{assume} is invalid and CoVeNN refines them using verified lb (line 12-line 18).

Refine Assumptions This refinement adjusts the assumptions to eliminate unverified regions, making them hold for the current preconditions and subnetwork. Refined assumptions then are propagated forward serving as input property for the next subnetwork.

When an estimated assumption γ_{assume} (line 10) cannot be verified, we need to refine it so that it becomes valid. Particularly, line 12-line 18 outlines CoVeNN's refinement method, which adjusts γ_{assume} using the formally verified lower bounds lb. CoVeNN first identifies the direction of the inequality to decide the appropriate refinement strategy. If the direction is " \geq ", the assumption being verified is of the form $Y_i \geq rhs$ (line 14). The verifier $\mathcal V$ has only formally confirmed that $Y_i - rhs \geq li$, where li < 0, meaning that Y_i is greater than or equal to rhs adjusted by the lower bound li. Therefore, to make that assumption valid, the right-hand side value is loosened as rhs + li (line 15). A dual of this process is used to refine the upper bounds.

3.4 Example

We illustrate CoVeNN by verifying that \mathcal{N} , depicted in Fig. 2a, has the property:

$$\phi \equiv \phi_{in} \implies \phi_{out} \equiv (-2 \le x_1 \le 2 \land -1 \le x_2 \le 1) \implies (y_1 > y_2) \tag{2}$$

When given the network $\mathcal N$ and the property ϕ , CoVeNN first attempts to prove $\mathcal N \models \phi$, denoted by the triple $\langle \phi_{in}, \mathcal N, \phi_{out} \rangle$, using an underlying verifier $\mathcal V$. Suppose $\mathcal V$ fails to verify the property due to memory exhaustion.

CoVeNN now decomposes $\mathcal N$ into two subnetworks (line 1), $\mathcal N_1$ and $\mathcal N_2$, such that $\mathcal N=\mathcal N_2\circ\mathcal N_1$ as shown in Fig. 2a. Next, CoVeNN uses $\mathcal V$ to compute an output overapproximation for the K-1

subnetworks from the input condition ϕ_{in} (line 3-line 4). We call the computed constraint an assumption and use γ_i to denote the assumption computed for network i. For this example, $\gamma_1 = -5 \le n_{21} \le 5 \land -10 \le n_{22} \le 10$. Since this assumption initially is an overapproximation, a consequence of this is that $\mathcal V$ has produced proof of $\langle \phi_{in}, \mathcal N_1, \gamma_1 \rangle$ inherently.

Once CoVeNN reaches the final subnetwork, it uses $\mathcal V$ to check the last overapproximation w.r.t. the output property (line 5), e.g., ϕ_{out} . If this succeeds then we have a proof that $\langle \phi_{in}, \mathcal N, \phi_{out} \rangle$. In this case, this does not succeed, so CoVeNN attempts to refine the assumption (line 8-line 22).

Refinement proceeds by sampling the behavior of \mathcal{N}_1 , subject to ϕ_{in} , and computes a hyperrectangle 203 that tightly approximates sampled outputs; Fig. 2b depicts this sampled region in red. In the example, 204 let this sampled assumption be $\sigma_1 = -2 \le n_{21} \le 2 \land -4 \le n_{22} \le 4$. Since this is a tight 205 approximation of the sampled behavior the likelihood that it is a valid postcondition of \mathcal{N}_1 is low. 206 We address this by interpolating between it and the overapproximating region to determine a new 207 assumption (line 10), γ_1' such that $\gamma_1 \supseteq \gamma_1' \supseteq \sigma_1$. With hyperrectangular constraints one approach is to simply scale the sampled region, $\gamma_1' = s \cdot (\gamma_1 - \sigma_1) + \sigma_1$, by some predefined factor, $s \in [0, 1]$. Fig. 2b depicts an interpolated region in green with a scaling factor of 0.5. In our example, this new assumption is $\gamma_1' = -3 \le n_{21} \le 3 \land -5 \le n_{22} \le 5$ and we use $\mathcal V$ to verify $\langle \phi_{in}, \mathcal N_1, \gamma_1' \rangle$ (line 11). 208 209 210 211 If this succeeds, then CoVeNN uses V to attempt to verify $\langle \gamma'_1, \mathcal{N}_2, \phi_{out} \rangle$ (line 19). If it fails we 212 exploit the output bounds computed by \mathcal{V} to generate a valid assumption (line 12-line 18): $\gamma_1''=$ 213 $(-4 \le n_{21} \le 4 \land -7 \le n_{22} \le 7)$ and CoVeNN then seeks to verify $\langle \gamma_1'', \mathcal{N}_2, \phi_{out} \rangle$ (line 19). In this example that verification succeeds, thereby completely the proof of $\langle \phi_{in}, \mathcal{N}, \phi_{out} \rangle$ through a 214 215 216 sequence of simpler verification problems.

3.5 Formal Correctness

217

The correctness of CoVeNN is based on the soundness of the assume-guarantee decomposition (§3.1) and the iterative refinement of the assumptions (§3.3). Note that we assume that the underlying verifier \mathcal{V} is sound, i.e., its overapproximations are valid (§3.2). Below we provide the theorems and proof sketches for the soundness of CoVeNN, the full proofs are provided in Apdx. B.

Compositional Verification The following states that the chain of assumptions and guarantees of subnetworks (§3.1) proves the original property $\phi_{in} \Rightarrow \phi_{out}$ of the entire network \mathcal{N} .

Thm. 1 (Compositional Verification via Assume-Guarantee Reasoning). Given a neural network $\mathcal{N}: \mathbb{R}^n \to \mathbb{R}^m$ decomposed into K subnetworks such that $\mathcal{N} = \mathcal{N}_K \circ \cdots \circ \mathcal{N}_1$, a property $\phi \equiv \phi_{in} \Rightarrow \phi_{out}$, and intermediate predicates $\gamma_1, \ldots, \gamma_{K-1}$, where $\gamma_0 = \phi_{in}$ and $\gamma_K = \phi_{out}$, the global specification holds whenever the every local property is valid:

$$\left(\bigwedge_{k=1}^{K} \langle \gamma_{k-1}, \mathcal{N}_k, \gamma_k \rangle \right) \implies \langle \phi_{in}, \mathcal{N}, \phi_{out} \rangle$$

228 Proof Sketch. For each pair of adjacent networks as shown in Eq. 1, assume-guarantee obligations are 229 proved, establishing that each intermediate predicate γ_k is preserved under corresponding subnetwork 230 \mathcal{N}_k . Composing these local guarantees forms a chain from the input property ϕ_{in} to the output 231 property ϕ_{out} , showing that the global specification holds for the entire network.

Refinement Process The following states that the refinement process (§3.3) states that each refinement step always results in bounds that are formally valid, thereby ensuring that the iterative tightening of assumptions preserves correctness throughout the verification chain.

Thm. 2 (Soundness of Iterative Bound Refinement). Suppose the base verifier \mathcal{V} soundly establishes, for a neuron Y_i , a right-hand side rhs, a direction $\preccurlyeq \in \{\geq, \leq\}$, and a corresponding verifier bound δ (where $\delta < 0$ for " \geq " and $\delta > 0$ for " \leq "), that $Y_i - rhs \not \preccurlyeq \delta$. Then, the refined inequality

$$Y_i \leq (rhs + \delta)$$

is verified. Therefore, updating the right-hand side to $rhs + \delta$ yields a verified assumption by V.

Proof Sketch. Given that the verifier soundly proves $Y_i - rhs \leq \delta$, it follows that $Y_i \leq (rhs + \delta)$ holds. Updating the bound accordingly yields a refined assumption that remains sound.

Tab. 1: Benchmark instances.

Benchmark	Layers	Neurons	Parameters	Instances (U/S/?)
VAE_BASE	20	43K	10K	20/0/0
VAE_WIDE	20	86K	39K	20/0/0
VAE_DEEP	28	44K	15K	7/0/13
RESNET6	20	283K	113K	11/0/9
RESNET12	38	627K	230K	9/0/11
RESNET18	56	700K	348K	18/0/2
RESNET36	110	1032K	706K	13/0/7
Total				98 / 0 / 42

Soundness of CoVeNN The following combines the previous two theorems to show that CoVeNN is sound: if all local subproblems generated during decomposition are either formally verified or refined, then the global property holds for the original network.

Thm. 3 (Soundness of CoVeNN). Let \mathcal{N} be a neural network and ϕ_{in} , ϕ_{out} be input/output properties such that CoVeNN verifies \mathcal{N} satisfies $\phi_{in} \Longrightarrow \phi_{out}$. CoVeNN applies Thm. 1 to decompose \mathcal{N} and assume all local subproblems are formally verified by a sound underlying verifier \mathcal{V} or formally refined as Thm. 2. Then \mathcal{N} indeed satisfies $\phi_{in} \Longrightarrow \phi_{out}$.

248 *Proof Sketch.* CoVeNN decomposes the network into subnetworks and verifies a sequence of assume-249 guarantee obligations using a sound verifier. By composing these verified local implications, the 250 global property $\phi_{in} \Rightarrow \phi_{out}$ follows.

4 Evaluation

251

258

259

260

261

262

263

264

265

267

268

269

270

We evaluate the scalability and cost-effectiveness of CoVeNN based on three research questions on CoVeNN's performance compared to state-of-the-art verifiers (**RQ1**); the effectiveness of refinement (§3.3) (**RQ2**); and CoVeNN's robustness to variations in the underlying verifier (**RQ3**).

Underlying Verifiers We experiment with two variants of CoVeNN, each configured with a different underlying verifier: NeuralSAT and $\alpha\beta$ -CROWN. Both tools are state-of-the-art in DNN verification¹, and allow us to extract the lower bound estimates needed for CoVeNN's refinement process.

Benchmarks We use two scalable families of benchmarks (Apdx. E). Tab. 1 provides details on the variants of the ResNet and VAE benchmarks used in our experiments. For each network, we generated 20 robustness properties. For ResNets these are local robustness classification properties and for VAEs these are local reconstruction robustness properties (Apdx. A). Across the 140 combinations of networks and properties: 98 are known to be unsat (U), none of them are sat (S), and of the remaining 42 instances no verifier in our study was able to solve the problem (?). Note that robustness properties can vary significantly in complexity based on the centerpoint and ϵ , e.g., [30, Fig. 2].

Setup Our experiments were run on a Linux machine with an AMD Ryzen Threadripper PRO 5975WX 32-Core, 128 GB RAM, and an NVIDIA GeForce RTX 4090 GPU with 24 GB VRAM. Timeout for a single instance is set to 3600 seconds or the maximum number of rounds r is 4. Note that our results are deterministic and no random process is involved. We describe detailed configuration and model information for our experiments in Apdx. E.


4.1 RQ1: Comparing to Non-Compositional SoTA Verifiers


Tab. 2 presents the results of running both CoVeNN variants (CoVeNN_{NS} and CoVeNN_{$\alpha\beta$}), CoVeNN_{Refine}—
a *naïve* version of CoVeNN without refinement using the NeuralSAT backend, and the standalone
NeuralSAT and $\alpha\beta$ -CROWN verifiers on the benchmarks. Column **V** shows the number of problems verified with the percentage solved shown in column **%**. Column **K** shows the number of decompositions inferred by CoVeNN. Tools that run out of memory or time out on a benchmark are

¹See results in the VNN-COMP'24 report [15, Tab. 35]. PyRAT is commercial and has no available code.

Tah	2. Com	naring	CoVoNN to	SOTA	verifiers.	most solved	nroblems	in bold
I ai).	Z. COIII	Daime	COVENIN	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	verillers.	THOSE SOLVED	LINODICHIS	III DOIG.

Verifier	V	AE_BA	SE	VA	E_W	DE	VA	E_DI	EEP	RF	ESNE'	Г6	RI	ESNE'	Г12	RE	SNET	18	RE	SNET	36	Ov	erall
vermer	V	%	K	V	%	K	V	%	K	V	%	K	V	%	K	V	%	K	V	%	K	\mathbf{V}	%
${\tt CoVeNN}_{NS}$	20	100.0	1-2	19	95.0	2	5	25.0	2	11	55.0	1	9	45.0	2	18	90.0	2	13	65.0	3	95	67.9
${\tt CoVeNN}_{\alpha\beta}$	4	20.0	2	-	-	-	6	30.0	2	10	50.0	1	9	45.0	2	17	85.0	2	13	65.0	3	59	42.1
${\tt CoVeNN}_{\tt Refine}$	3	15.0	1	-	-	-	-	-	-	11	55.0	1	9	45.0	2	9	45.0	2	13	65.0	3	45	32.1
NeuralSAT	3	15.0	1	-	-	-	-	-	-	11	55.0	1	-	-	-	-	-	-	-	-	-	14	10.0
$\alpha \beta$ -CROWN	1	5.0	1	-	-	-	-	-	-	10	50.0	1	-	-	-	-	-	-	-	-	-	11	7.9





(b) Average memory usage per verifier.

Fig. 3: CoVeNN performance compared to SoTA verifiers.

indicated with a "-" (e.g., NeuralSAT cannot solve any instances of RESNET12 and VAE_DEEP, etc.). Across the benchmarks CoVeNN solves more than 6 times the number of problems than the best non-compositional solver. We note that neither NeuralSAT nor $\alpha\beta$ -CROWN could solve any instances of VAE_WIDE, VAE_DEEP, RESNET12 and beyond, which demonstrates the ability of CoVeNN to scale verification beyond the state-of-the-art. RESNET36, which is comprised of 110 convolutional layers, requires the most aggressive decomposition (K=3), but even for such a large network CoVeNN is able to verify 65% of the properties. CoVeNN_{Refine} performs better than standalone verifiers, but falls short of any CoVeNN variants, demonstrating the importance of refinement (§4.2).

Fig. 3a and Fig. 3b provide additional details on runtime and memory usage. Fig. 3a shows that regardless of the underlying solver or whether CoVeNN uses its refinement strategy (§3.3) it can solve many more problems than NeuralSAT and $\alpha\beta$ -CROWN within the same time constraints. While NeuralSAT and $\alpha\beta$ -CROWN reach their limits after solving 14 problems, CoVeNN solves as many as 95 instances. Fig. 3b shows that CoVeNN consumes significantly less memory² than NeuralSAT and $\alpha\beta$ -CROWN, which often encounter OOM errors. §E.3 reports on a more detailed parameter and ablation study of CoVeNN on these benchmarks.

4.2 RQ2: On the Effectiveness of Assumption Refinement

Fig. 3a shows that even without refinement, $CoVenN_{Refine}$ solves nearly 4 times as many problems as SoTA methods and that this rises to nearly 7 times with refinement enabled. To explore how refinement achieves this we recorded additional data on the refinement process. Fig. 4 reports, for each problem where K>1, the percentage of neurons that were tightened in some round of refinement (red); the percentage by which the output ranges of those neurons were reduced (blue); and number of rounds of refinement performed (green - on the 2nd y-axis).

For the VAE benchmarks, 17 of the BASE problems and all of the other problems involved refinement. There were more rounds of refinement and, except for the DEEP benchmark, this resulted in a high percentage of tightened neurons and significant output range reduction. For the DEEP benchmark, rounds of refinement continued until the timeout was reached on 15 of the 20 problems. For the RESNET benchmarks, we observe a very different profile. Fewer rounds of refinement were needed,

²Measured by the internal function torch.cuda.mem_get_info in PyTorch.

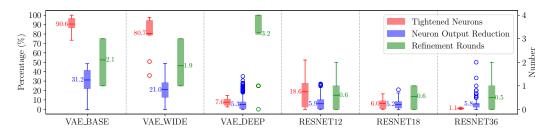


Fig. 4: Percentage of neurons tightened and percentage of their output range reduction.

especially for RESNET18 which was able to prove 18 of the 20 problems. This is more than double the amount that could be proven with refinement disabled. The verification problems are randomly sampled across all benchmarks which leads to different performance profiles. The data for RESNET12 and RESNET36 demonstrate that for some problems the compositional nature of CoVeNN alone can lead to verification improvements (see the CoVeNN_{Refine} row in Tab. 2), but the additional effort of refinement does not yield further improvements.

4.3 RQ3: Robustness to Underlying Verifiers

Tab. 2 clearly indicates that CoVeNN significantly increase the number of solved problems regardless of the underlying verifier. While CoVeNN_{NS} outperforms CoVeNN $_{\alpha\beta}$, our analysis suggests that this is not a fundamental limitation of either CoVeNN or $\alpha\beta$ -CROWN.

We analyzed the performance of $CoVenN_{\alpha\beta}$ on VAE_BASE and VAE_WIDE, the cases where there was a substantial performance gap. We found that $\alpha\beta$ -CROWN does not support ConvTranspose layers in several of its heuristics for applying optimizations. This means that its performance in both verifying assumptions line 11 and verifying the final subnetwork line 19 suffer. We conjecture that better support for this layer type could ameliorate this issue, but we acknowledge that $\alpha\beta$ -CROWN has numerous hyperparameters and we did not perform the type of expert tuning that the developers of $\alpha\beta$ -CROWN apply when running benchmarks. The reduced performance on VAE benchmarks could be due to this as well.

The RESNET benchmarks show a clearer trend. $\alpha\beta$ -CROWN comes with hyperparameter settings for this architecture which we reuse, and we see very consistent degrees of improved scalability regardless of the underlying verifier.

In summary, (**RQ1**) CoVeNN verifies over 6x more problems than SOTA verifiers and scales to deeper networks with less memory, highlighting the effectiveness of decomposition. (**RQ2**) Refinement *significantly boosts performance*: CoVeNN_{Refine} already outperforms SoTA by 4x, and refinement raises this to nearly 7x. (**RQ3**) CoVeNN significantly improves verification regardless of underlying solvers (performance gaps depend on the backends, not from CoVeNN itself).

5 Conclusion

 NNV has scaled tremendously in recent years, but networks continue to grow in complexity which limits the applicability of SoTA NNV techniques to real-world networks. Our work on CoVeNN is a first step in realizing the promise of compositional neural network verification, and preliminary results show that CoVeNN can scale significantly beyond SoTA verifiers.

Limitations We plan a broader exploration of the impact of parameters of the framework and to develop adaptive strategies for selecting parameters, such as decomposing heuristics, the number of neurons P and interpolation factor F, for each sub-problem. More broadly, our framework does not currently use feedback from counterexamples, but we plan to explore how they can be used to identify the dimensions within an assumption that must be tightened to eliminate violations.

Potential Negative Societal Impact The techniques developed in this work can reveal flaws in sensitive applications that may be exploited for malicious intent. However, these same methods also allow developers to identify such attacks and fix them prior to model deployment.

338 References

- 138 [1] R. Wang, T. Lei, R. Cui, B. Zhang, H. Meng, and A. K. Nandi, "Medical image segmentation using deep learning: A survey," *IET Image Processing*, vol. 16, no. 5, pp. 1243–1267, 2022.
- [2] B. Kovatchev, A. Castillo, E. Pryor, L. L. Kollar, C. L. Barnett, M. D. DeBoer, S. A. Brown, and N. S. Team, "Neural-net artificial pancreas: a randomized crossover trial of a first-in-class automated insulin delivery algorithm," *Diabetes Technology & Therapeutics*, vol. 26, no. 6, pp. 375–382, 2024.
- [3] L. Zhang, A. J. Yang, Y. Xiong, S. Casas, B. Yang, M. Ren, and R. Urtasun, "Towards unsupervised object detection from lidar point clouds," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 9317–9328, 2023.
- P. Wu, X. Jia, L. Chen, J. Yan, H. Li, and Y. Qiao, "Trajectory-guided control prediction for
 end-to-end autonomous driving: A simple yet strong baseline," *Advances in Neural Information Processing Systems*, vol. 35, pp. 6119–6132, 2022.
- [5] H. Shao, L. Wang, R. Chen, H. Li, and Y. Liu, "Safety-enhanced autonomous driving using interpretable sensor fusion transformer," in *Conference on Robot Learning*, pp. 726–737, PMLR, 2023.
- [6] G. Katz, C. Barrett, D. L. Dill, K. Julian, and M. J. Kochenderfer, "Reluplex: An efficient SMT solver for verifying deep neural networks," in *International Conference on Computer Aided Verification*, pp. 97–117, Springer, 2017.
- [7] R. Bunel, P. Mudigonda, I. Turkaslan, P. Torr, J. Lu, and P. Kohli, "Branch and bound for piecewise linear neural network verification," *Journal of Machine Learning Research*, vol. 21, no. 2020, 2020.
- [8] D. Zhou, C. Brix, G. A. Hanasusanto, and H. Zhang, "Scalable neural network verification with
 branch-and-bound inferred cutting planes," arXiv preprint arXiv:2501.00200, 2024.
- [9] C. Ferrari, M. N. Mueller, N. Jovanović, and M. Vechev, "Complete Verification via Multi-Neuron Relaxation Guided Branch-and-Bound," in *International Conference on Learning* Representations, 2022.
- ³⁶⁵ [10] H. Duong, D. Xu, T. Nguyen, and M. B. Dwyer, "Harnessing neuron stability to improve dnn verification," *Proc. ACM Softw. Eng.*, vol. 1, no. FSE, 2024.
- [11] H. Wu, O. Isac, A. Zeljić, T. Tagomori, M. Daggitt, W. Kokke, I. Refaeli, G. Amir, K. Julian,
 S. Bassan, et al., "Marabou 2.0: a versatile formal analyzer of neural networks," in *International Conference on Computer Aided Verification*, pp. 249–264, Springer, 2024.
- 570 [12] S. Bak, "nnenum: Verification of ReLU Neural Networks with Optimized Abstraction Refinement," in *NASA Formal Methods Symposium*, pp. 19–36, Springer, 2021.
- [13] C. Brix, M. N. Müller, S. Bak, T. T. Johnson, and C. Liu, "First three years of the international verification of neural networks competition (VNN-COMP)," *International Journal on Software Tools for Technology Transfer*, pp. 1–11, 2023.
- ³⁷⁵ [14] C. Brix, S. Bak, C. Liu, and T. T. Johnson, "The Fourth International Verification of Neural Networks Competition (VNN-COMP 2023): Summary and Results," 2023.
- [15] C. Brix, S. Bak, T. T. Johnson, and H. Wu, "The fifth international verification of neural networks competition (vnn-comp 2024): Summary and results," *arXiv preprint arXiv:2412.19985*, 2024.
- 379 [16] S. Bak, C. Liu, and T. Johnson, "The Second International verification of Neural Networks
 380 Competition (VNN-COMP 2021): Summary and Results," *arXiv preprint arXiv:2109.00498*,
 381 2021.
- 182 [17] H. Duong, T. Nguyen, and M. Dwyer, "A DPLL(T) Framework for Verifying Deep Neural Networks," *arXiv preprint arXiv:2307.10266*, 2024.
- 18] PyRAT, "A tool to analyze the robustness and safety of neural networks," 2024.
- 185 [19] H. Zhang, S. Wang, K. Xu, L. Li, B. Li, S. Jana, C.-J. Hsieh, and J. Z. Kolter, "General cutting planes for bound-propagation-based neural network verification," *Proceedings of the* 36th International Conference on Neural Information Processing Systems, 2022.

- 1388 [20] K. He, X. Zhang, S. Ren, and J. Sun, "Deep residual learning for image recognition," in Proceedings of the IEEE conference on computer vision and pattern recognition, pp. 770–778, 2016.
- [21] F. Nielson, H. R. Nielson, and C. Hankin, Principles of Program Analysis. Springer, 1999.
- D. Gopinath, H. Converse, C. Pasareanu, and A. Taly, "Property inference for deep neural networks," in 2019 34th IEEE/ACM International Conference on Automated Software Engineering (ASE), pp. 797–809, IEEE, 2019.
- R. Ivanov, K. Jothimurugan, S. Hsu, S. Vaidya, R. Alur, and O. Bastani, "Compositional learning and verification of neural network controllers," *ACM Transactions on Embedded Computing Systems (TECS)*, vol. 20, no. 5s, pp. 1–26, 2021.
- P. Cousot and R. Cousot, "Abstract interpretation: a unified lattice model for static analysis
 of programs by construction or approximation of fixpoints," in *Proceedings of the 4th ACM SIGACT-SIGPLAN symposium on Principles of programming languages*, pp. 238–252, 1977.
- ⁴⁰¹ [25] J. Misra and K. M. Chandy, "Proofs of networks of processes," *IEEE transactions on software engineering*, no. 4, pp. 417–426, 1981.
- [26] E. W. Stark, "A proof technique for rely/guarantee properties," in Foundations of Software
 Technology and Theoretical Computer Science: Fifth Conference, New Delhi, India December
 16–18, 1985 Proceedings 5, pp. 369–391, Springer, 1985.
- J. M. Cobleigh, G. S. Avrunin, and L. A. Clarke, "Breaking up is hard to do: An evaluation of automated assume-guarantee reasoning," *ACM Transactions on Software Engineering and Methodology (TOSEM)*, vol. 17, no. 2, pp. 1–52, 2008.
- [28] C. S. Păsăreanu, D. Giannakopoulou, M. G. Bobaru, J. M. Cobleigh, and H. Barringer, "Learning to divide and conquer: applying the 1* algorithm to automate assume-guarantee reasoning,"
 Formal Methods in System Design, vol. 32, pp. 175–205, 2008.
- 412 [29] T. H. Cormen, C. E. Leiserson, R. L. Rivest, and C. Stein, *Introduction to algorithms*. MIT press, 2022.
- [30] D. Xu, N. J. Mozumder, H. Duong, and M. Dwyer, "Training for verification: Increasing neuron stability to scale DNN verification," in *Tools and Algorithms for the Construction and Analysis of Systems 30th International Conference, TACAS 2024, Held as Part of the European Joint Conferences on Theory and Practice of Software, ETAPS*, p. to appear, Springer, 2024.
- 418 [31] F. Toledo, D. Shriver, S. Elbaum, and M. B. Dwyer, "Deeper notions of correctness in image-419 based dnns: Lifting properties from pixel to entities," in *Proceedings of the 31st ACM Joint* 420 European Software Engineering Conference and Symposium on the Foundations of Software 421 Engineering, pp. 2122–2126, 2023.
- 422 [32] K. Ahmed, K.-W. Chang, and G. Van den Broeck, "A pseudo-semantic loss for autoregressive 423 models with logical constraints," *Advances in Neural Information Processing Systems*, vol. 36, 424 2024.
- [33] J. K. Christopher, S. Baek, and F. Fioretto, "Constrained synthesis with projected diffusion models," in *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- 428 [34] D. P. Kingma, "Auto-encoding variational bayes," arXiv preprint arXiv:1312.6114, 2013.
- 429 [35] R. Rombach, A. Blattmann, D. Lorenz, P. Esser, and B. Ommer, "High-resolution image synthesis with latent diffusion models," in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10684–10695, 2022.
- 432 [36] S.-i. Amari, "Backpropagation and stochastic gradient descent method," *Neurocomputing*, vol. 5, no. 4-5, pp. 185–196, 1993.
- [37] D. Xu, D. Shriver, M. B. Dwyer, and S. Elbaum, "Systematic Generation of Diverse Benchmarks for DNN Verification," in *International Conference on Computer Aided Verification*, pp. 97–121, Springer, 2020.
- 437 [38] A. Loquercio, A. I. Maqueda, C. R. Del-Blanco, and D. Scaramuzza, "Dronet: Learning to fly by driving," *IEEE Robotics and Automation Letters*, vol. 3, no. 2, pp. 1088–1095, 2018.

439 A DNN Properties

For a neural network, $\mathcal{N}: \mathbb{R}^n \mapsto \mathbb{R}^m$, specifications of *functional* properties constrain the output of \mathcal{N} based on its input. Specifying such necessary conditions for DNN input-output relations is a topic of great interest with applications as test oracles in DNN testing [31], training objectives to maximize network property conformance [32], and biasing generative models to produce outputs that conform to a property [33]. A broad class of properties can be formulated using pairs of half-space polytopes – each specified as the conjunction of cutting planes – where one set defines the pre-condition, ϕ_{in} , and another the post-condition, ϕ_{out} . A variety of different properties can be formulated using such pre-post condition pairs but we focus on two popular classes of properties below.

448 **Classification Robustness** A well-studied class of properties express local robustness properties of the form:

$$\forall p \in [0, \epsilon] : \mathcal{N}(x) = \mathcal{N}(x \pm p),$$

where x is a specific seed input, often chosen from the held out test dataset. These express that network inference is invariant for perturbations within the convex ϵ -ball, $x \pm p$, for the seed input. A variant of this, with a post-condition of the form $\|\mathcal{N}(x) - \mathcal{N}(x \pm p)\| \le \beta$ can be defined for regression networks.

Reconstruction Robustness Generative models are formulated as neural networks, $\mathcal{N}: \mathbb{R}^n \to \mathbb{R}^n$, and are trained to approximate the identify function [34, 35]. For such, models one can adapt the regression robustness property above, to define a local reconstruction robustness property of the form:

$$\forall p \in [0, \epsilon] : ||\mathcal{N}(x \pm p) - x||_{\infty} \le \beta,$$

for a seed input x. The β parameter expresses the expected agreement between an input and its reconstruction.

456 B Correctness Proofs of CoVeNN

Let $\mathcal{N}: \mathbb{R}^n \to \mathbb{R}^m$ denote a neural network, and let $\phi_{in}(x)$ and $\phi_{out}(y)$ be input and output property of interest, respectively. The global verification objective is to prove:

$$\forall x \in \mathbb{R}^n : \phi_{in}(x) \implies \phi_{out}(\mathcal{N}(x))$$
 (3)

Chain of Proofs. Given \mathcal{N} , we decompose into K sequential subnetworks: $\mathcal{N} = \mathcal{N}_K \circ \mathcal{N}_{K-1} \circ \cdots \circ \mathcal{N}_1$, where each $\mathcal{N}_k : \mathbb{R}^{d_{k-1}} \to \mathbb{R}^{d_k}$, with $d_0 = n$ and $d_K = m$.

Let $\gamma_0 := \phi_{in}$ and $\gamma_K := \phi_{out}$; we seek to synthesize K-1 intermediate predicates (assumptions) $\gamma_1, \ldots, \gamma_{K-1}$ over intermediate network states.

Following the classical assume-guarantee (sequential composition) proof principle, the global property is entailed by the following chain of K local obligations:

$$\forall k = 1, \dots, K : \langle \gamma_{k-1}, \mathcal{N}_k, \gamma_k \rangle \tag{4}$$

465 If all these obligations hold, we have:

$$\left(\bigwedge_{k=1}^{K} \langle \gamma_{k-1}, \mathcal{N}_k, \gamma_k \rangle \right) \implies \langle \phi_{in}, \mathcal{N}, \phi_{out} \rangle \tag{5}$$

Thus global verification is reduced to a finite sequence of smaller verification problems.

Automated Synthesis of Intermediate Assumptions. Given a subnetwork \mathcal{N}_k , input constraint γ_{in} , an overapproximate output bound $\gamma_{over} = (L_{over}, U_{over})$, number of neurons P, and scale factor $F \in [0,1]$, we synthesize the candidate assumption γ_{assume} as follows.

First, CoVeNN computes the sampled output region by solving:

$$L_{sample} = \min_{x \in \gamma_{in}} \mathcal{N}_k(x) \qquad U_{sample} = \max_{x \in \gamma_{in}} \mathcal{N}_k(x)$$
 (6)

- where each minimization and maximization is performed through backpropagation.
- Next, CoVeNN interpolates between the overapproximate and sampled bounds to obtain:

$$L_{int} = L_{sample} - F \cdot (L_{sample} - L_{over}) \qquad U_{int} = F \cdot (U_{over} - U_{sample}) + U_{sample}$$
 (7)

Let $Select(L_{int}, U_{int}, P)$ denote a selection of P neuron indices for which the interval $[L_{int}[i], U_{int}[i]]$ is top-P largest. The synthesized assumption γ_{assume} for \mathcal{N}_k is then the set of inequalities:

$$\gamma_{assume} = \left\{ Y_i \ge L_{int}[i], \quad Y_i \le U_{int}[i] \mid i \in Select(L_{int}, U_{int}, P) \right\}$$
(8)

- where Y_i denotes the *i*-th output of \mathcal{N}_k .
- Iterative Refinement. For each refinement round r, and for each subnetwork \mathcal{N}_i $(i=1,\ldots,K-1)$, let the current overapproximate bound for its output be denoted by $(L_i^{(r)},U_i^{(r)})$. Given an assumption γ_{assume} (constructed as above) and the formally verified lowerbounds lb extracted from the underlying verifier, consider all neurons j selected for tightening. For each such j with assumption direction (" \geq " or " \leq ") and associated right-hand side rhs, let l_j be the corresponding lower bound from lb. The refined bounds are updated by:

$$L_i^{(r+1)}[j] = \begin{cases} rhs + l_j, & \text{if direction is "} \geq " \\ L_i^{(r)}[j], & \text{otherwise} \end{cases} \quad U_i^{(r+1)}[j] = \begin{cases} rhs - l_j, & \text{if direction is "} \leq " \\ U_i^{(r)}[j], & \text{otherwise} \end{cases} \tag{9}$$

All other coordinates are left unchanged. The updated tuple $(L_i^{(r+1)}, U_i^{(r+1)})$ forms the new tightened overapproximation for the next refinement round, and subsequent rounds proceed analogously unless the verification succeeds or the allowed number of rounds is exhausted.

486 B.1 Chain of Proofs

Thm. 1 (Compositional Verification via Assume-Guarantee Reasoning) Given a neural network $\mathcal{N}: \mathbb{R}^n \to \mathbb{R}^m$ decomposed into K subnetworks such that $\mathcal{N} = \mathcal{N}_K \circ \cdots \circ \mathcal{N}_1$, a property $\phi \equiv \phi_{in} \Rightarrow \phi_{out}$, and intermediate predicates $\gamma_1, \ldots, \gamma_{K-1}$, where $\gamma_0 = \phi_{in}$ and $\gamma_K = \phi_{out}$, the global specification holds whenever every local property is valid:

$$\left(\bigwedge_{k=1}^{K} \langle \gamma_{k-1}, \mathcal{N}_k, \gamma_k \rangle \right) \implies \langle \phi_{in}, \mathcal{N}, \phi_{out} \rangle$$

- Proof. Let $\mathcal{N} = \mathcal{N}_K \circ \mathcal{N}_{K-1} \circ \cdots \circ \mathcal{N}_1$ denote the decomposition into K composed subnetworks. Let the intermediate predicates be $\gamma_0, \gamma_1, \ldots, \gamma_K$ with $\gamma_0 = \phi_{in}$ and $\gamma_K = \phi_{out}$. We are given that
- for every $k = 1, \dots, K$,

$$\forall z \in \mathbb{R}^{d_{k-1}} : \gamma_{k-1}(z) \implies \gamma_k(\mathcal{N}_k(z)), \quad \text{or} \quad \langle \gamma_{k-1}, \mathcal{N}_k, \gamma_k \rangle$$

494 We show that:

$$\forall x \in \mathbb{R}^n : \phi_{in}(x) \implies \phi_{out}(\mathcal{N}(x)), \quad \text{or} \quad \langle \phi_{in}, \mathcal{N}, \phi_{out} \rangle$$

- Let $x \in \mathbb{R}^n$ such that $\phi_{in}(x)$ holds. That is, $\gamma_0(x)$.
- Base case (k = 1): By the first obligation, $\gamma_0(x) \implies \gamma_1(\mathcal{N}_1(x))$, so $\gamma_1(z_1)$ holds for $z_1 = \mathcal{N}_1(x)$.
- Induction step: Assume for some $1 \le k < K$ that $\gamma_{k-1}(z_{k-1})$ holds for some z_{k-1} . Then, by the k-th obligation, $\gamma_k(\mathcal{N}_k(z_{k-1}))$ holds for $z_k = \mathcal{N}_k(z_{k-1})$.
- By unrolling, starting from $\gamma_0(x)$, we obtain via repeated application:

$$\gamma_1(z_1), \ \gamma_2(z_2), \ \ldots, \ \gamma_K(z_K), \ \text{where} \ z_k = \mathcal{N}_k(z_{k-1}), \ z_0 = x$$

- In this case, $z_K = \mathcal{N}_K(\cdots \mathcal{N}_1(x)) = \mathcal{N}(x)$ and $\gamma_K(z_K)$ means $\phi_{out}(\mathcal{N}(x))$.
- Therefore, for any x satisfying $\phi_{in}(x)$, we have $\phi_{out}(\mathcal{N}(x))$. That is,

$$\forall x: \phi_{in}(x) \implies \phi_{out}(\mathcal{N}(x))$$

Thus, the global specification holds.

Alg. 2: Generate assumptions.

```
input :DNN \mathcal{N}, input property \gamma_{in}, overapproximation \gamma_{over}, number of neurons P, and scale factor F output :Assumptions \gamma_{assume}

1 (L_{over}, U_{over}) \leftarrow \gamma_{over}

2 L_{sample} \leftarrow \text{Minimize}(\mathcal{N}, \gamma_{in}) // minimize output of \mathcal{N} for samples from \gamma_{in}

3 U_{sample} \leftarrow \text{Maximize}(\mathcal{N}, \gamma_{in}) // maximize output of \mathcal{N} for samples from \gamma_{in}

4 L_{int} \leftarrow L_{sample} - F \cdot (L_{sample} - L_{over}) // interpolate output lower bounds of \mathcal{N}

5 U_{int} \leftarrow F \cdot (U_{over} - U_{sample}) + U_{sample} // interpolate output upper bounds of \mathcal{N}

6 \gamma_{assume} \leftarrow []

7 for i \in \text{Select}(L_{int}, U_{int}, P) do // select top-P neurons

8 \gamma_{assume}. \gamma_{assume}.
```

04 B.2 Soundness of Iterative Bound Refinement

Thm. 2 (Soundness of Iterative Bound Refinement) Suppose the base verifier \mathcal{V} soundly establishes, for a neuron Y_i , a right-hand side rhs, a direction $\preccurlyeq \in \{\geq, \leq\}$, and a corresponding verifier bound δ (where $\delta < 0$ for " \geq " and $\delta > 0$ for " \leq "), that $Y_i - rhs \preccurlyeq \delta$. Then, the refined inequality

$$Y_i \preccurlyeq (rhs + \delta)$$

is soundly verified. Therefore, updating the right-hand side to $rhs + \delta$ yields an assumption formally verified by V.

Proof. Consider the case when the direction is " \geq ". The assumption being verified takes the form $Y_i \geq rhs$ (line 14). \mathcal{V} soundly verifies that $Y_i - rhs \geq \delta$, where $\delta = li$ and $\delta < 0$. This implies $Y_i \geq rhs + \delta$. Therefore, to ensure this assumption is valid, we update the right-hand side to $rhs + \delta$ (line 15), confirming $Y_i \geq rhs + \delta$ holds. Similarly, a dual of this process is used to refine the upper bounds. In both cases, replacing the original bound rhs with $rhs + \delta$ yields an assumption that is formally validated by the verifier. Thus, the refinement procedure produces sound bounds.

This theorem formalizes the soundness of our bound refinement procedure, which is a critical component of our iterative assumption generation. Specifically, it ensures that each refinement step, guided by the verifier's output, always results in bounds that are formally valid, thereby guaranteeing that the iterative tightening of assumptions preserves correctness throughout the verification chain.

B.3 Soundness of CoVeNN

520

Thm. 3 (Soundness of CoVeNN) Let \mathcal{N} be a neural network and ϕ_{in} , ϕ_{out} be input/output properties such that CoVeNN verifies \mathcal{N} satisfies $\phi_{in} \implies \phi_{out}$. Assume all local subproblems are formally verified by a sound underlying verifier \mathcal{V} or formally refined as Thm. 2. Then \mathcal{N} indeed satisfies $\phi_{in} \implies \phi_{out}$.

Proof. Follow the arguments in §B.1, for any x with $\phi_{in}(x)$, we have

$$\phi_{in}(x) \implies \gamma_1(\mathcal{N}_1(x)) \implies \gamma_2(\mathcal{N}_2(\mathcal{N}_1(x))) \implies \cdots \implies \phi_{out}(\mathcal{N}(x)).$$

Thus, \mathcal{N} satisfies $\phi_{in} \implies \phi_{out}$. The correctness of CoVeNN is thus relative to the soundness of the underlying verifier: if the verifier establishes each local property, then the global specification holds.

The algorithm terminates because only finitely many refinement rounds are permitted for each γ_i .

However, completeness is not guaranteed: the verifier may fail to establish some obligations or the

refinement limit may be reached, in which case CoVeNN may output unknown.

C Constructing Assumptions

We seek to automate the generation of assumptions for the second obligation in Eq. 1, I, by adapting the verification of the first rule to approximate them. Alg. 2 outlines a systematic method to estimate and construct these assumptions. We use γ to denote the values of intermediate steps in the process of computing $I - \gamma_{in}$ is the assumption for \mathcal{N} , and γ_{assume} is the computed assumption for the subsequent network. The underlying verifier is able to compute a sound overapproximation of a given subnetwork's output for γ_{in} , which we denote with γ_{over} . These bounds, (L_{over}, U_{over}) , are often too imprecise to allow verification of the overall problem.

We construct tighter assumptions, γ_{assume} , by interpolating between the overapproximation and a space defined by sampling the behavior of \mathcal{N} . Fig. 2b illustrates three distinct types of regions. The solid red line represents the *actual* operational region of a hidden ReLU within a DNN. Due to the inherent non-linearity of DNNs, calculating this exact region for hidden neurons is computationally infeasible. Instead, verification processes commonly use sound overapproximations to capture the behavior of each neuron, such as the triangular area bounded by (L_{over}, U_{over}) . However, this introduces imprecision which can accumulate during verification of the layers of a DNN.

We compute a sampling region by minimizing (maximizing) the output of \mathcal{N} for a set of sample inputs from γ_{in} (line 2-line 3). This process uses backpropagation which requires that the minimization and maximization be performed separately [36]. These samples offer a tighter, more realistic representation of the network output bounds by considering adversarial conditions. The sampled region, (L_{sample}, U_{sample}) , is likely to disprove subsequent verification sub-problems, since there is a high probability of counterexamples existing close to these bounds L_{sample} and U_{sample} . To mitigate this risk, we compute an interpolated region, (L_{int}, U_{int}) , between the sampled region and the overapproximation (line 4-line 5); the degree of interpolation can be controlled by F.

Rather than attempt to prove the full hypercube of an assumption, modern DNN verifiers [19, 8, 9, 10] have been engineered to prove subsets of clauses of the DNF encoding of the negation of the assumption – this is significantly faster in practice. We select the P neurons with the largest interval size as determined by sampling to tighten (line 7). Selected constraints are then tightened by using the upper/lower bounds from γ_{int} (line 8-line 9). Selective tightening allows us to mitigate the cost of downstream verification, since after the initial verification pass, only assumptions for tightened neurons need to be re-verified.

562 D Related Work

564

565

566

567

568 569

571

572

SoTA tools in DNN verification, such as those evaluated in VNN-COMP, integrating multiple techniques to improve scalability and efficiency. Leading verifiers, including NeuralSAT [17, 10] and $\alpha\beta$ -CROWN [19, 8], split problems into smaller subproblems and refine bounds on subproblems. NeuralSAT and $\alpha\beta$ -CROWN leverage GPU-accelerated linear bound propagation alongside advanced BaB techniques, such as cutting planes and neuron stabilizing, to handle harder networks. Marabou [11] encodes verification as constraint problems and employs parallelized split-and-conquer strategies to improve scalability. nnenum [12] achieves impressive performance on low dimensional networks using star sets and zonotope abstractions. CoVeNN can be viewed as a meta-verifier that decompose large verification problems into smaller subproblems, and leverage these existing SoTA verifiers to solve them.

There are two notable prior works addressing on compositional verification of DNNs. Ivanov et al. [23] introduces a compositional framework to break a high-level task into subtasks or subcomponents, such as breaking down car navigation task into track segment, each representing a distinct system mode (e.g., going straight or turning). Unlike CoVeNN, which focuses on decomposing the DNN itself, this work decomposes the task that may rely on DNNs.

Prophecy [22] uses an expensive decision tree algorithm to infer intermediate specifications. Their approach (1) is exponentially with the number of neurons, (2) records only activation patterns for ReLUs at one single layer (layer pattern) which is selected by hand, (3) does not support iterative refinements, and (4) and depends on training data. CoVeNN addresses these by inferring specifications by recording computed bounds for neurons which (1) scales along with DNN verifier algorithms, (2) records richer intermediate specifications that record ranges of activation values—which is essential for handling non-ReLU activations and automatically infers decompositions, (3) allows intermediate

specifications to be refined based on the property being checked, and (4) does not require training data. Lastly, Prophecy explicitly does not support Resnet and reports results on a few samples of small networks (e.g., ACAS Xu) which are not representative of modern DNNs.

E More Details on Experiments

589

E.1 Experimental Setup, Solver Selection, and Benchmarks

Setup Our experiments are conducted on a desktop with an AMD Ryzen Threadripper PRO 5975WX 32-Core, 128 GB RAM, and an NVIDIA GeForce RTX 4090 GPU with 24 GB VRAM. Our implementation is based on the open-source NeuralSAT verifier³ with decomposition related code added. For RQ1 and RQ2, NeuralSAT was used as the backend verifier, while both $\alpha\beta$ -CROWN and NeuralSAT were used in RQ3. Timeout for a single instance is set as 3600 seconds. The maximum number of rounds r is set to 4. Note that these parameters can be changed easily by CoVeNN's user.

Underlying Solver Selection We tried several CPU-based verifiers, such as nnenum [12] and Marabou [11], but none of them could solve any instance of the benchmarks and their results would be all "-" if added to Tab. 2. In addition, we also tried running $\alpha\beta$ -CROWN and NeuralSAT on CPU with instances that they got OOM errors and they all ended up being killed by the operating system or took more than 30 minutes even for a single abstraction pass. This is not surprising as our work is explicitly designed to solve problems that are beyond what can be solved by current NNV tools.

Benchmark Selection The VNN-COMP benchmark suite is a useful starting point, but prior work [13, 37] notes that its benchmarks are often too easy for best verifiers. Our goal is to find benchmarks that go beyond what can be solved. We approached this from two directions: (1) scaling an existing VNN-COMP benchmark and (2) introducing a new challenging benchmark family.

Most VNN-COMP benchmarks lack a clear path for scaling, but the ResNet benchmark is an exception: increasing the number of residual blocks aligns with real-world models like DroNet [38] and ResNet-152 [20]. We used this scaling strategy, adapting the training setup from Pytorch Image Models (timm)⁴.

To complement ResNet, we added a new benchmark family based on variational autoencoders (VAEs), which are naturally decomposable at their latent bottleneck layer. We adapted the encoder/decoder from Stable Diffusion⁵, reduced its complexity for tool compatibility, and trained it on CIFAR10 using the simplified version of the original training code.

614 E.2 Model architectures

We summarize the model structures in our experiments in Tab. 3. Let Conv(a,b,c) be a conventional convolutional layer with a input channel, b output channels and a kernel size of $c \times c$. Let ConvTran(a,b,c) be a transposed convolutional layer with a input channel, b output channels and a kernel size of $c \times c$. The stride and padding sizes are intentionally omitted for simplicity. Let Lin(a,b,c) be a fully-connected layer with a input features and b output features. Let ResBlock(a,b) stands for a residual block that has a input channels and b output channels. A ResBlock is comprised of 2 paths, where the main path contains 2 Conv and the residual path contains 1 Conv. All networks use ReLU activation only.

623 E.3 Ablation Study

624 E.3.1 Tools Scalability

Tools' scalability of the two top performing verifiers in VNN-COMP'24, $\alpha\beta$ -CROWN and NeuralSAT, and CoVeNN on ResNet-based instances is shown in Tab. 4. Number of completed jobs for each verifier is (**verified**, **unknown**) where "-" means that the verifier aborted with an OOM error on all 10 properties.

³https://github.com/dynaroars/neuralsat

⁴https://github.com/huggingface/pytorch-image-models

⁵https://github.com/explainingai-code/StableDiffusion-PyTorch

Tab. 3: Model architectures used in our experiments.

Network	Architecture	Params
VAE_BASE	$\begin{aligned} &\text{Encoder: } Conv(3,8,3), ResBlock(8,8), Conv(8,8,4), ResBlock(8,8), Conv(8,1,3), Conv(1,1,1) \\ &\text{Decoder: } Conv(1,1,1), Conv(1,8,3), ResBlock(8,8), ConvTran(8,8,4), ResBlock(8,8), Conv(8,3,3) \\ \end{aligned}$	10K
VAE_WIDE	$\label{eq:conv} \begin{split} &\text{Encoder: } Conv(3,16,3), ResBlock(16,16), Conv(16,16,4), ResBlock(16,16), Conv(16,1,3), Conv(1,1,1) \\ &\text{Decoder: } Conv(1,1,1), Conv(1,16,3), ResBlock(16,16), ConvTran(16,16,4), ResBlock(16,16), Conv(16,3,3) \\ \end{split}$	39K
VAE_DEEP	$\begin{aligned} &\text{Encoder: } Conv(3,8,3), ResBlock(8,8), 2 \times \Big[Conv(8,8,4), ResBlock(8,8)\Big], Conv(8,1,3), Conv(1,1,1) \\ &\text{Decoder: } Conv(1,1,1), Conv(1,8,3), 2 \times \Big[ResBlock(8,8), ConvTran(8,8,4)\Big], ResBlock(8,8), Conv(8,3,3) \end{aligned}$	15K
RESNET6	$Conv(3, 16, 3), ResBlock(16, 32), 05 \times ResBlock(32, 32), Lin(32, 10)$	113K
RESNET12	$Conv(3, 16, 3), ResBlock(16, 32), 11 \times ResBlock(32, 32), Lin(32, 10)$	230K
RESNET18	$Conv(3, 16, 3), ResBlock(16, 32), 17 \times ResBlock(32, 32), Lin(32, 10)$	348K
RESNET36	$Conv(3, 16, 3), ResBlock(16, 32), 35 \times ResBlock(32, 32), Lin(32, 10)$	706K

Tab. 4: Number of completed jobs for each verifier (**verified**, **unknown**); "-" means that the verifier aborted with an OOM error on all 10 properties.

#Blocks	lphaeta-CROWN	NeuralSAT	${\tt CoVeNN}_{NS}$
3	(6, 4)	(6, 4)	(6, 4)
6	(5, 5)	(5, 5)	(5, 5)
9	(8, 2)	(9, 1)	(9, 1)
12	-	-	(7, 3)
18	-	-	(8, 2)
36	-	-	(6, 4)

As detailed in Tab. 4, CoVeNN matches the ability of underlying verifiers on problems for which they complete and the refinement strategies allow it to prove properties when scaling to much larger networks.

E.3.2 CoVeNN Performance

In Alg. 1, CoVeNN has several tunable parameters, such as number of neurons P – number of assumptions generated each round, scale factor F – interpolating factor for generating assumptions in Alg. 2, and rounds r. We fixed the maximum number of rounds at r=4, underlying verifier NeuralSAT, and we perform a parameter search with $P \in \{64, 128, 256\}$ and $F \in \{1/3, 1/2\}$. CoVeNN's performances with different combinations of parameters are shown in Fig. 5. CoVeNN_{Refine} simply terminates if CoVeNN fails to verify problems after initialization step (line 6) and returns unknown immediately.

The ablation plot in Fig. 5 shows the number of problems solved for various configurations of CoVeNN. Each line represents a distinct setting of P (number of assumptions per round) and F (interpolation factor), as well as comparisons to baselines such as NeuralSAT, $\alpha\beta$ -CROWN, CoVeNN_{Refine}, and CoVeNN variants with different underlying verifiers.

The differences among CoVeNN performances clearly show that CoVeNN is especially sensitive to P, which controls how many neurons are selected by CoVeNN for refinement in each round. In particular, when P is small (e.g., 64), CoVeNN considers fewer neurons in each iteration, resulting in fewer opportunities to tighten bounds. As a result, the refinement process yields only modest improvements on the generated assumptions, thus, limiting the number of problems solved by CoVeNN (83 problems).

On the other hand, with a larger P (e.g., 256), CoVeNN attempts to refine many more neurons in one round, leading to increased computational cost (e.g., runtime) for its refinement. Theoretically, this could lead to more assumptions being tightened, thus, yielding tighter approximations, the larger number of verifying assumptions takes time, and often causing CoVeNN to be timed out before proving properties. This is experimentally shown in the setting of $\{P=256, F=1/3\}$ (blue) and $\{P=256, F=1/2\}$ (purple) lines, which solve fewer problems, 91 and 92, respectively.

The factor F is less sensitive to CoVeNN. The tiny differences between F=1/3 and F=1/2 (e.g., a single problem, for fixed P=128) suggest that CoVeNN's refinement is robust to changes in how

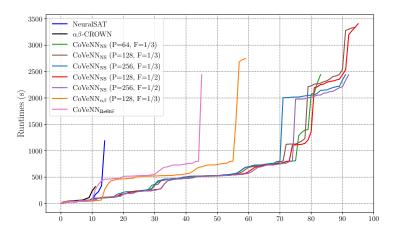


Fig. 5: Ablation study on different parameters of CoVeNN.

assumptions are interpolated. Eventhough CoVeNN might generate overly coarse assumptions and that underlying verifier could not verify them, the iterative refinement §3.3 could still effectively achieve a sufficient precision.

CoVeNN_{Refine} terminates immediately at the initialization step if the initial abstraction step fails to verify problems (line 6). In contrast, the full-blown CoVeNN with tuned (P, F) parameters demonstrates the best overall performance.

661

662

663

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [Yes]

Justification: Our claims match our theoretical and empirical results — CoVeNN solved more problems than SoTA NNV tools across benchmarks.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the
 contributions made in the paper and important assumptions and limitations. A No or
 NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals
 are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: The limitations are explicitly mentioned in §5.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was
 only tested on a few datasets or with a few runs. In general, empirical results often
 depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [Yes]

Justification: The theorems and their proof sketches are listed in §3.5 and detailed in Apdx. B. Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and crossreferenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: The model architectures and configurations used are provided in §4 and Apdx. E

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

771 Answer: [Yes]

Justification: The data and code with instructions to reproduce the results have been uploaded to an anonymized repo.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (https://nips.cc/public/guides/CodeSubmissionPolicy) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so "No" is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run
 to reproduce the results. See the NeurIPS code and data submission guidelines (https://nips.cc/public/guides/CodeSubmissionPolicy) for more details.
- The authors should provide instructions on data access and preparation, including how
 to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new
 proposed method and baselines. If only a subset of experiments are reproducible, they
 should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyper-parameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: Experimental details have been provided in Apdx. E.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [NA]

Justification: Verification results are deterministic on the benchmarks, and no error bars need to be provided.

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).

- It should be clear whether the error bar is the standard deviation or the standard error
 of the mean.
 - It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
 - For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
 - If error bars are reported in tables or plots, The authors should explain in the text how
 they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859 860

861

862

863

864

865

866

867

868

869

870

871

Justification: Detailed hardware resources are provided in §4 and Apdx. E.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics https://neurips.cc/public/EthicsGuidelines?

Answer: [Yes]

Justification: We have acknowledged the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a
 deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: They have been discussed in §5.

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal
 impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.

- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [NA]

Justification: No data or models are released.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do
 not require this, but we encourage authors to take this into account and make a best
 faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: We cited both $\alpha\beta$ -CROWN and NeuralSAT, and libraries used for experimental evaluation.

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.

 If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

925

926

927

928

929

930

931

932

933

934

935 936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

952

953

954

955 956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [NA]

Justification: No new assets are introduced in this paper.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA]

Justification: The paper paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]

Guidelines:

Justification: The paper does not involve crowdsourcing nor research with human subjects.

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigorousness, or originality of the research, declaration is not required.

Answer: [NA]

976

977

978

979

980

981

982

983

984

985

987

Justification: LLM was only used for revising writing and suggesting words.

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (https://neurips.cc/Conferences/2025/LLM) for what should or should not be described.